


The *nLock* is an innovative **self-contained** single door lockset combining all the necessary hardware and electronics to manage access of employees and visitors through one door. Designed using field proven spread spectrum **WIRELESS** Technology, installation time and labor is drastically reduced to less than 30 minutes since no wiring or external power is required. Simply remove the old lockset, mount the *nLock* to the door and it's ready to go!

The *nLock* is available in a variety of reader configurations and finishes depending on system and architectural requirements. The unit communicates with the Security Center Software via a Wireless Access Hub (*nHub*) for a maximum range of 300 feet. Battery powered, the *nLock* will continue to operate even in a power failure providing the highest security possible.

The *nLock* leverages a unique **LEARN MODE** capability eliminating the need for bulk downloading. Upon initial card usage, a request will be sent to the *nHub* requesting details about the access card record. The *nHub* will send the encrypted information to the lock where the access decision is made. This ensures the Portal has the latest information when you need it.

The *nLock* has a built-in proximity reader (125 KHz) and is available with or without a keypad. The *nLock* can be used with a card only, or combination card + PIN code for higher security applications. Each *nLock* supports 5,000 cardholders, 16 time schedules and 32 customer defined holidays.

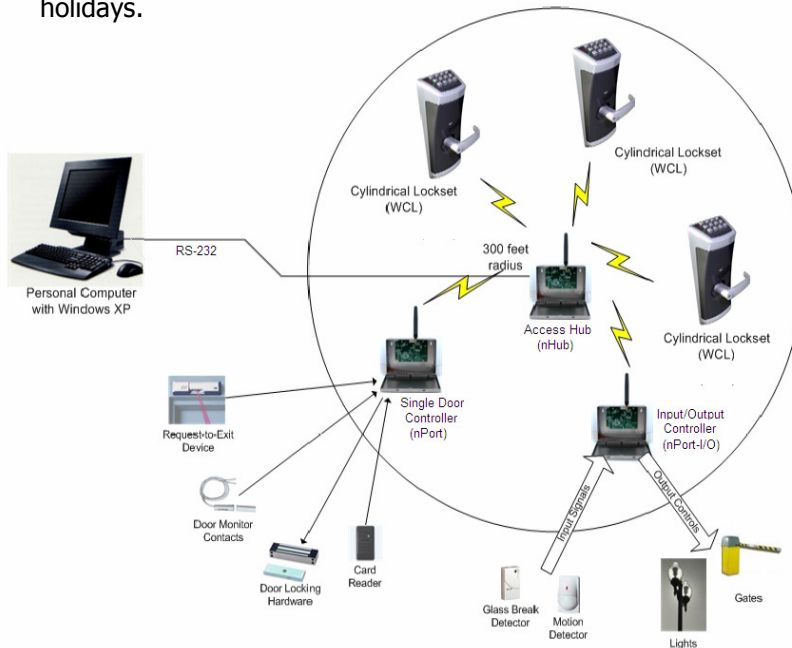

- ❖ Cylindrical
- ❖ Finishes:
 - Brushed Aluminum
 - Brushed Brass
- ❖ Standard backsets of 2-3/4, 3-3/4 or 5 inches
- ❖ Door depths of 1-3/4 to 2 inches
- ❖ Sargent and Arrow cylindrical door cutouts
- ❖ Accommodates Yale and Schlage cylindrical door cutouts
- ❖ 20,000 Transactions
- ❖ Door Status Contact Input
- ❖ Exit Request (built-in to handset)
- ❖ Operating Temperature of 5-90% relative humidity (non-condensing)
- ❖ Spread Spectrum (902-928 Mhz)
- ❖ FCC Part 15
- ❖ Patented Technology*
- ❖ UL294*
- ❖ 1 Year Warranty

The *nLock* series is just one in a family of wireless products targeted to the small to medium sized applications. Used in conjunction with the Security Center Software, *nSecure*, the system accommodates up to 64 controllers and locksets. Doors that do not require the *nLock* but need security can use industry standard card readers and the Wireless Single Door Controller.

The Future Has Arrived... And It's Wireless